


Electronic pressure switches

ATM/GR

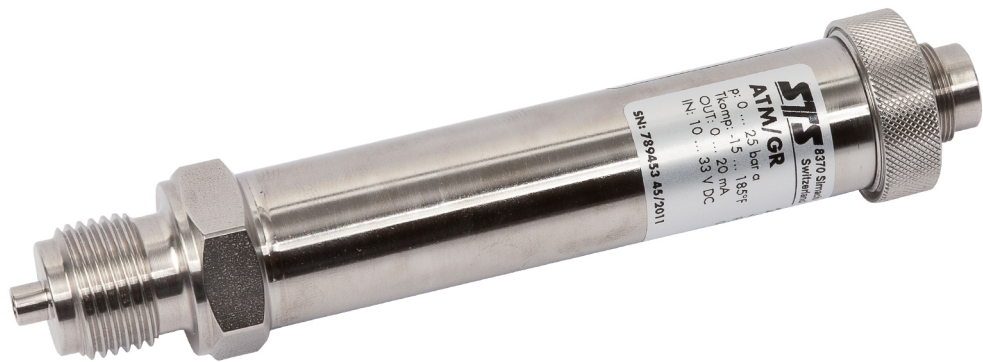

Version: 13.11.2013

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 25
Overpressure	3 bar	3 x FS (min. 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (5), (± % FS)	≤ 0.5 / ≤ 0.25	≤ 0.5 / ≤ 0.25 / ≤ 0.1	≤ 0.5 / ≤ 0.25 / ≤ 0.1
Thermal shift, (± % FS/°C)			
Zero point 0...70°C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85°C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70°C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85°C	≤ 0.02	≤ 0.02	≤ 0.02
Long term stability, (6)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 25 ... 600, (2), (3), (4)	> 600 ... 1000, (2)
Overpressure	3 x FS (≤ 850 / ≤ 1500 bar)	1500 bar
Burst pressure	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (5), (± % FS)	≤ 0.5 / ≤ 0.25 / ≤ 0.1	≤ 1 / ≤ 0.5 / ≤ 0.25
Thermal shift, (± % FS/°C)		
Zero point 0...70°C	≤ 0.015	≤ 0.015
Zero point -25...85°C	≤ 0.02	≤ 0.02
Span 0...70°C	≤ 0.015	≤ 0.015
Span -25...85°C	≤ 0.02	≤ 0.02
Long term stability, (6)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Process connection frontal and flush diaphragm available ≤ 600 bar

(4) Overpressure and burst pressure 1500 bar (stainless steel) optional







(5) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(6) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-25...85 °C
Process temperatur	-40...150 °C
Storage temperatur	-25...85 °C

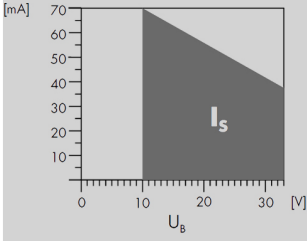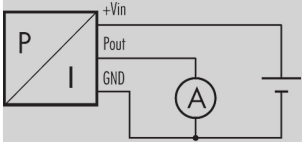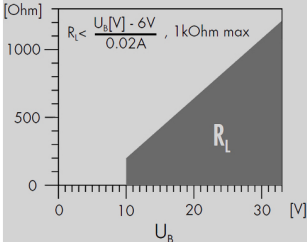Electrical specifications

Analog output	0...20 / 4...20 mA		
Power supply	10...33 V DC		
Current consumption, (1)			
Circuit diagram			
Load resistance			
Switches			
Number of switches	2 (independent)		
Type	SPDT (Relais)		
Adjustment	Potentiometer		
Setting range	0...100% FS		
Switching voltage, (max.)	48 V DC		
Switching current, (max.)	2 A		
Switching power, (max.)	60 W		
Switching functions			
Description	Pressure is below both set points: both relays are selected.	Pressure is over the set point 1 (relay 1 is released), but below the set point 2 (relay 2 is selected).	Pressure is over both set points: both relays are released or the supply voltage is missing.

(1) Both switches activated, without current output

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PVC

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview

Additional documents

Operating and safety instructions

	Article number
10.88.0092	DMM029

Ordering information









		X. XXXX.	XXXX.	XX.	XXX
Type					
	ATM/GR	27			
Pressure type					
	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range					
	50 mbar...<100 mbar	XX			
	100 mbar...600 bar	XX			
	> 600 bar	XX			
	Negative ranges, offset, special adjustment	99			
Process connection					
	G 1/4 F (Fig. 1)	00			
	1/4 NPT M	10			
	1/2 NPT M (Fig. 8)	19			
	G 1/4 M (Fig. 2)	11			
	G 1/4 flush diaphragm	21			
	G 1/4 M, manometer DIN 16288 (Fig. 3)	12			
	G 1/2 M, (Fig. 4)	13			
	G 1/2 M Hastelloy C-276	98			
	G 1/2 M, frontal diaphragm (Fig. 5), (4)	14			
	G 1/2 M, frontal diaphragm	37			
	G 1/2 M, flush diaphragm (Fig. 6), (4)	15			
	G 1/2 M, manometer DIN 16288 (Fig. 7)	16			
	G 1/2 male with bore Ø 14 mm	17			
	Customized connection available	99			
Electrical connection					
	Binder 723, 12-pin, IP 67 (Fig. 10), (5)		45		
	PVC cable grey, IP 67 (Fig. 11), (6)		10		
	Customized connection available		99		
Output signal					
	0...20 mA, 2 relays		14		
	4...20 mA, 2 relays		15		
Accuracy					
	≤ 600 bar ≤ ± 0.5 % FS			0	
	≤ 600 bar ≤ ± 0.25 % FS			1	
	≤ ± 0.1 % FS			2	
	> 600 bar ≤ ± 1 % FS			5	
	> 600 bar ≤ ± 0.5 % FS			0	
	> 600 bar ≤ ± 0.25 % FS			1	
Temperature range					
	0...70 °C compensated (allowed process temperature: -25...100 °C)			0	
	-25...85 °C compensated (allowed process temperature: -25...100 °C)			1	
	-25...85 °C compensated (allowed process temperature: -25...150 °C) with cooling fins			2	
Option 1					
	Throttle, (7)				A
	Special oil filling: Anderol Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications), (8), (9), (10)				H

Special oil filling: AS100 for meda temp -55...150°C)	(suitable				J
Special oil filling: PAO4 (Silicone free)					Q
Option 2					
Electronics packed in gel: Gauge pressure					C
Electronics packed in gel: Absolute pressure					D
Option 3					
Version titanium (without ballast weight)					K
Seals: Viton (standard)					U
Seals: EPDM					S
Seals: Kalrez (Industry)					T



- (1) 50 mbar on request
- (2) Titanium available \leq 400 bar (burst pressure > 550 bar)
- (3) mbar, PSI, kPa etc. available
- (4) Process connection available \leq 600 bar
- (5) Cable socket connector not included
- (6) Please specify the required cable length and medium
- (7) Only with pressure connection Fig. 2, Fig. 3, Fig. 4, Fig. 7 and Fig. 8
- (8) Maximum pressure measuring range \leq 270 bar (burst pressure > 400 bar)
- (9) min. Medium temperature -25 ° C
- (10) Standard, no special cleaning. Special cleaning must be requested.

Technical drawings


Pressure connection



Dimensions

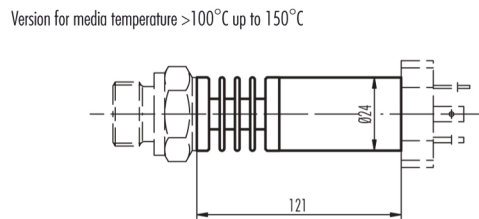



Electrical connection

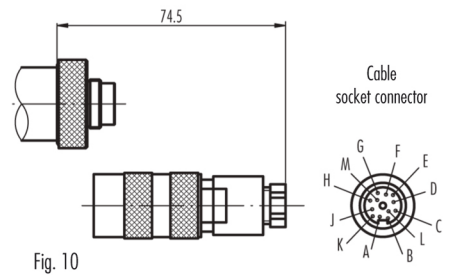

Pin	
A	+Vin
L	Pout
B	GND
E	NC1
D	COM1
F	NO1
H	NC2
G	COM2
J	NO2

Colour	
white	+Vin
brown	Pout
yellow	GND
green	NC1
orange	COM1
violet	NO1
red	NC2
blue	COM2
black	NO2



Connector side

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it